

MAX PUSH 6000N	MAX PULL 4000N	NO-LOAD 5 mm/s	LOAD 3.5 mm/s	IP RATING IP54
-------------------	-------------------	-------------------	------------------	-------------------

PRODUCT



Standard online strokes	2, 4, 6, 8, 10, 12, 14, 16, 18 in
OEM custom stroke range	50-700 mm


ELECTRICAL CURRENT

12V NO-LOAD	12V LOAD	24V NO-LOAD	24V LOAD
1.5 A	8.5 A	0.6 A	3.8 A

TECHNICAL SPECIFICATIONS

Model	HH-LA-U3
Motor power	60 W
Voltage	12V / 24V DC
No-load speed	5 mm/s
Load speed	3.5 mm/s
Maximum push force	6000 N
Maximum pull force	4000 N
Maximum self-locking load	8000 N
Duty cycle	10%-20%
Operating temperature	-20°C to 60°C
Motor type	Brushed DC motor
Noise	< 40 dB
Limit	Built-in
Installation length	A = S + 175 mm

MECHANICAL REFERENCE

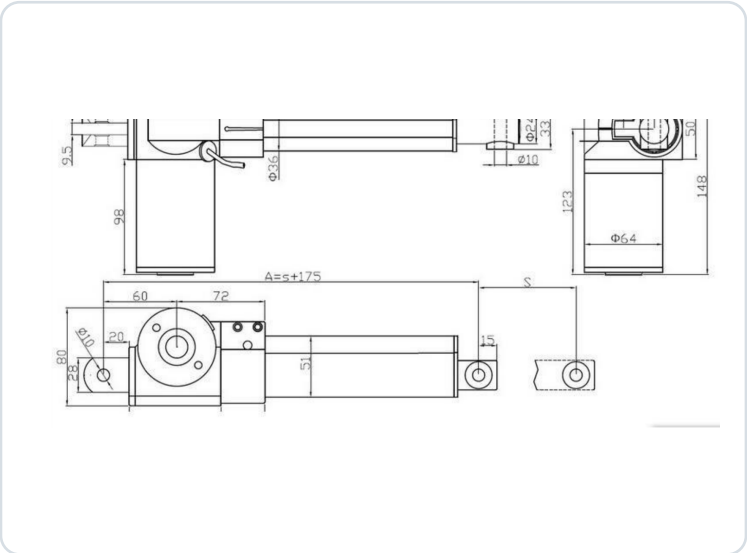

DIMENSION NOTE

S = stroke length. Installation length A = S + 175 mm. Custom configurations should be confirmed before ordering.